

Cheek block (P&S)

Line requirements:


- 2 x (13'-7" plus two eye splices) 29' - Shackle/hook at either end
- 2 x (15'-8" plus two eye splices) 33' - Shackle/hook at one end; shackle/block at other
- 1 x (42' plus eye splices) 44' - Shackle and block at both ends
- 1 x (15' plus tail plus eye splice) 20' - Shackle and block at one end

Line thru cheek blocks goes to lines on both sides of boom.

Control line on front of mast is attached to block which rides on the line described above. This arrangement ensures equal tension on both sides of boom.

126' - 5/16"

The length of the bottom two lines listed can also be such that the setup could be slacked to the point that the lines from the side of the boom could be hooked under the reefing hooks at the gooseneck, to keep them out of the way, as an alternative to disconnecting them from the boom. That alternative sets the max length needed for the upper line.

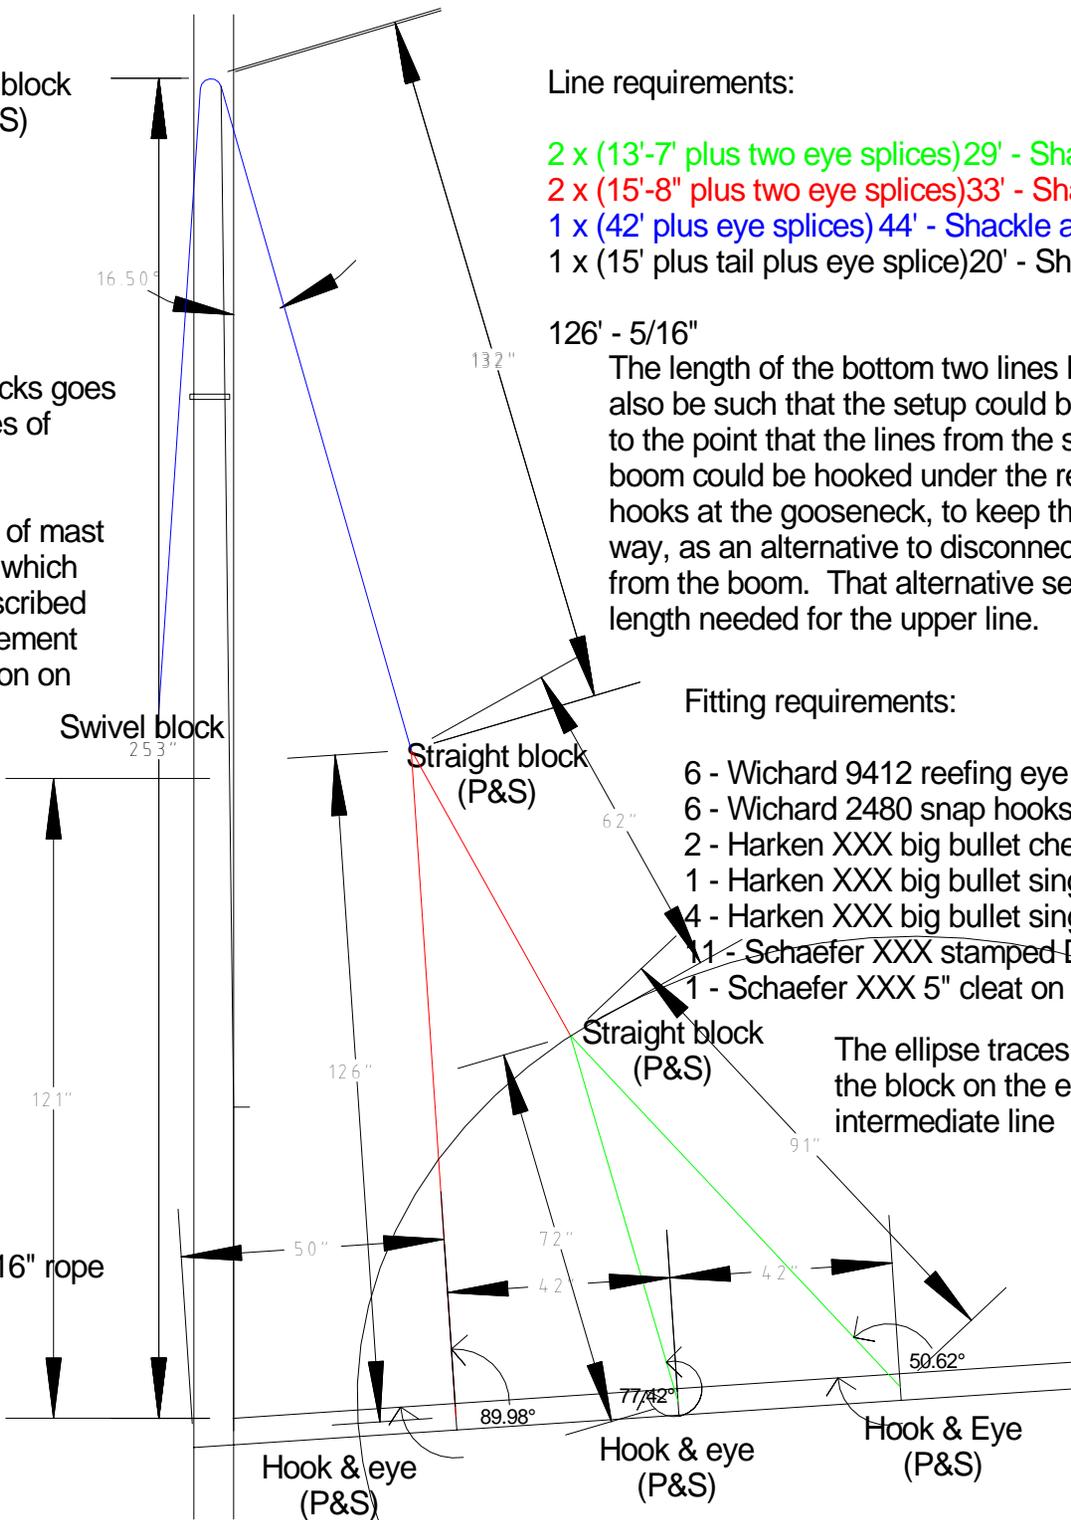

Fitting requirements:

- 6 - Wichard 9412 reefing eye
- 6 - Wichard 2480 snap hooks
- 2 - Harken XXX big bullet cheek blocks (mast)
- 1 - Harken XXX big bullet single swivel blocks
- 4 - Harken XXX big bullet single blocks-equalizer block on front of mast
- 1 - Schaefer XXX stamped D shackles-fasten blocks and hooks to eye splices
- 1 - Schaefer XXX 5" cleat on mast

The ellipse traces the path of the block on the end of the intermediate line

PERELANDRA  
Lazy jack dimensions

Mark Prestero  
978-887-9219